

US SERIES Pallet Platform

KEY FEATURES


- Ultra Low Profile for Easy Loading
- 100% End Loading
- Epoxy Painted Mild Steel or 304 Stainless Steel Structure
- Equipped with Handgrip and Wheel for Fast Mobility and Setup
- Bubble Level and Internal Junction Box Included
- Load Cell Cable = 3 Meter

SPECIFICATIONS

Model	Capacity	Material	Load Cell
US-1	1000kg	Epoxy Painted Mild Steel	Alloy Steel OIML R60 C3 Approved
US-2	2000kg		
US-3	3000kg		
US-S1	1000kg	304 Stainless Steel	Stainless Steel IP67 R60 C3 OIML Approved or IP68 Non-Approved Hermetically Sealed
US-S2	2000kg		
US-S3	3000kg		
End Loading	100%		
Load Cell Output	3mV/V		
Operating Environment	-10~40°C(14~104°F) Non Condensing R.H. ≤85%		

Specifications subject to change prior to notice

DIMENSIONS (mm)

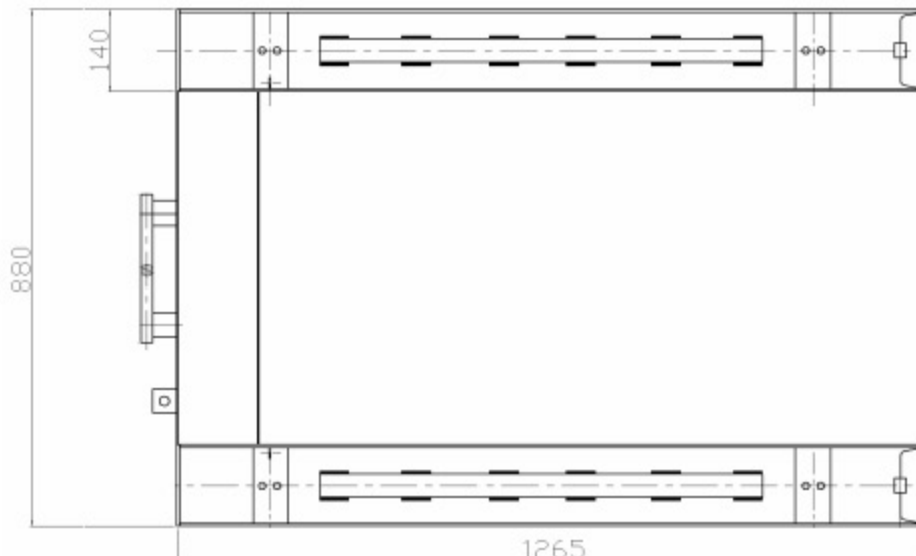

Overall Height with Adjustable Feet = 85mm