
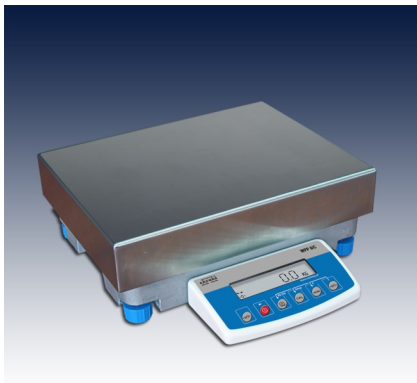



# PRECISION BALANCES WPP

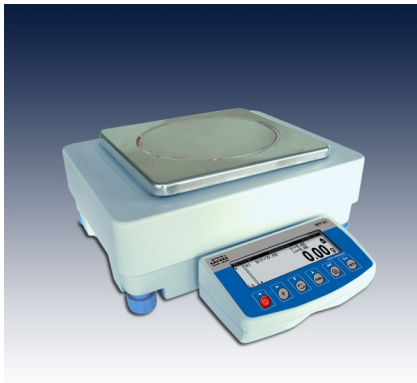

Precision balances series WPP are offered in two solutions, weighing platform dimensions either 260 x 230 mm or 285 x 365 mm. Depending on the type, balances are equipped with backlit graphic display or backlit LCD display.

Each series of WPP balances is offered with following capacities: 6, 10, 12, 25 and 6/35 kg. Independently on version, WPP balance is based on electromagnetic measuring system, external calibration (internal for scales X/2 and C/2) and RS 232 output.

Balance casing is made of aluminum, weighing pan is in stainless steel technology. Balances series WPP have under hook weighing as standard solution.

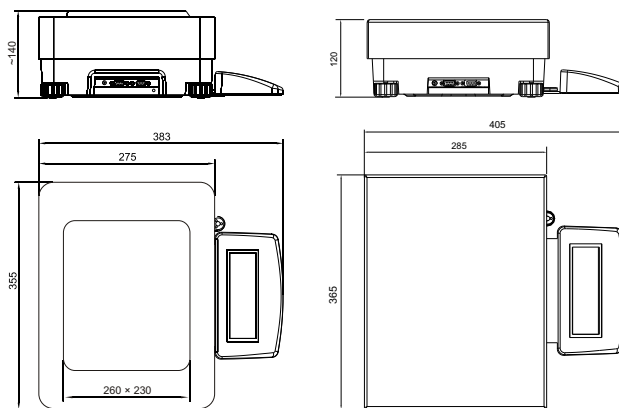

- Counting pieces
- Filling\*
- Animal\* weighing
- Density determination
- Checkweighing\*
- Percentage
- Statistics\*
- Formulation\*

\*except for balances with LCD display

2 years warranty period

## Technical data:

	WPP 6/X	WPP 6/C	WPP 10/X	WPP 10/C10	WPP 12/X	WPP 25/X	WPP 25/C	WPP 6/35/C
	WPP 6/X/2	WPP 6/C/2	WPP 10/X/2	-	WPP 12/X/2	WPP 25/X/2	WPP 25/C/2	-
Max capacity	6 kg	6 kg	10 kg	10 kg	12 kg	25 kg	25 kg	6/35 kg
Readability	0,01 g	0,01 g	0,01 g	0,1 g	0,1 g	0,1 g	0,1 g	1/5 g
Tare range	-6 kg	-6 kg	-10 kg	-10 kg	-12 kg	-25 kg	-25 kg	-35 kg
Repeatability	0,01 g	0,01 g	0,01 g	0,1 g	0,1 g	0,1 g	0,1 g	1/5 g
Linearity	±0,02 g	±0,02 g	±0,02 g	±0,1 g	±0,1 g	±0,1 g	±0,1 g	±1/5 g
Pan size	260 x 230 mm			365 x 285 mm				
Working temperature	+15° - +40 °C							
Operation time	3 s							
Power supply	230V 50Hz / 8VA							
Calibration weight	5 kg	5 kg	5 kg	5 kg	5 kg	10 kg	10 kg	10 kg
Display	graphic	LCD	graphic	LCD	graphic	graphic	LCD	LCD
Mass	~10 kg	~10 kg	~10 kg	~10 kg	~10 kg	~10 kg	~10 kg	~10 kg

## Additional equipment:

"KAFKA" THERMAL PRINTER	LCD ADDITIONAL DISPLAY
NEEDLE PRINTER "EPSON"	EXTERNAL RECHARGEABLE BATTERY PACK
CITIZEN LABEL PRINTER *	CALIBRATION WEIGHT
PC KEYBOARD PS/2 *	COMPUTER SOFTWARE: PW-WIN 2005
FOOT BUTTON FOR TARE OR PRINT FUNCTIONS *	COMPUTER SOFTWARE: RAD-KEY 2000

\*except for balances with LCD display

## Zakład Mechaniki Precyzyjnej RADWAG

26-600 Radom, Bracka Street 28 POLAND  
 Phone: +48 48 3848800 Fax: +48 48 3850010  
 Sales department: +48 48 3668006  
 www.radwag.com e-mail: export@radwag.com

Scale Direct (Scotland) Ltd  
 01236 872810  
 www.scaledirect.co.uk  
 email: sales@scaledirect.co.uk